

金属圆柱形-M4/M5

01



产品说明:

不锈钢金属外壳，螺纹圆柱外形，直流三线输出，IP67防护等级，高亮LED指示灯，紧凑外形尺寸。

参数:

型号	额定工作距离	安装方式	输出	电源电压	额定电流	开关频率	环境温度	接线方式	机械图
Fi0.8-KM04-OP6L	0.8mm	齐平	PNP NO	10...30VDC	≤100mA	2500Hz	-25...70℃	2米电缆	图1
Fi0.8-KM04-ON6L	0.8mm	齐平	NPN NO	10...30VDC	≤100mA	2500Hz	-25...70℃	2米电缆	图1
Fi0.8-KM04-CP6L	0.8mm	齐平	PNP NC	10...30VDC	≤100mA	2500Hz	-25...70℃	2米电缆	图1
Fi0.8-KM04-CN6L	0.8mm	齐平	NPN NC	10...30VDC	≤100mA	2500Hz	-25...70℃	2米电缆	图1
Fi1-KM05-OP6L	1mm	齐平	PNP NO	10...30VDC	≤100mA	1000Hz	-25...70℃	2米电缆	图2
Fi1-KM05-ON6L	1mm	齐平	NPN NO	10...30VDC	≤100mA	1000Hz	-25...70℃	2米电缆	图2
Fi1-KM05-CP6L	1mm	齐平	PNP NC	10...30VDC	≤100mA	1000Hz	-25...70℃	2米电缆	图2
Fi1-KM05-CN6L	1mm	齐平	NPN NC	10...30VDC	≤100mA	1000Hz	-25...70℃	2米电缆	图2
Fi1-KM05-OP6L-Q8	1mm	齐平	PNP NO	10...30VDC	≤100mA	1000Hz	-25...70℃	M8连接器	图3
Fi1-KM05-ON6L-Q8	1mm	齐平	NPN NO	10...30VDC	≤100mA	1000Hz	-25...70℃	M8连接器	图3
Fi1-KM05-CP6L-Q8	1mm	齐平	PNP NC	10...30VDC	≤100mA	1000Hz	-25...70℃	M8连接器	图3
Fi1-KM05-CN6L-Q8	1mm	齐平	NPN NC	10...30VDC	≤100mA	1000Hz	-25...70℃	M8连接器	图3

机械图:

图1

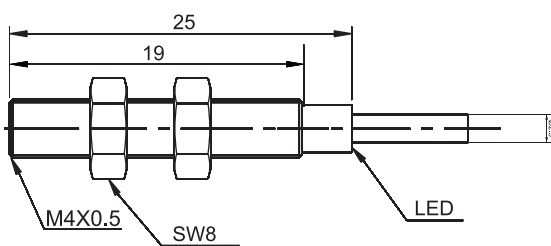


图2

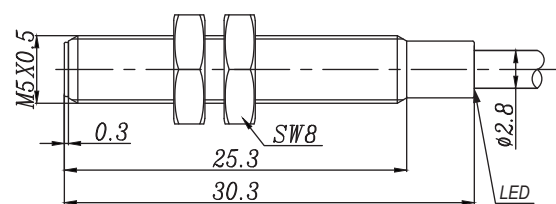


图3

